


**Composizione della ferramenta seconda l'altezza del battente in battuta**

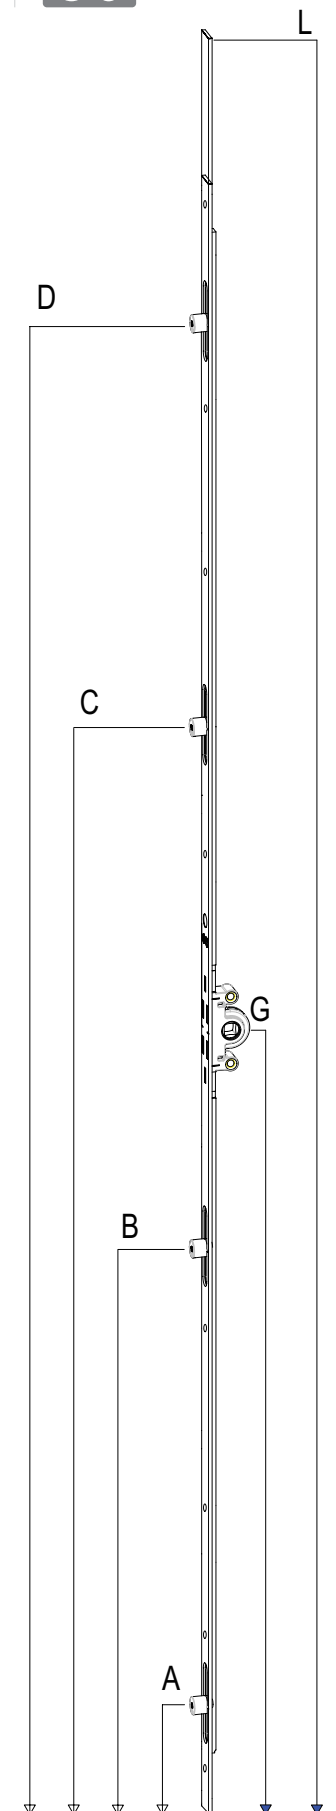

*Asta a rulli per apertura a bandiera- Mantellina ad altezza costante*

Articolo	Altezza - HBB	G	L	PC	A	B	C	D
G-12425-04-4-1	350 - 450	155	450	2	42	271	-	-
G-12425-05-4-1	451 - 550	155	550	2	42	371	-	-
G-12425-07-4-1	551 - 700	200	700	2	42	471	-	-
G-12425-08-4-1	701 - 850	250	850	2	42	621	-	-
G-12425-10-4-1	851 - 975	400	975	2	42	771	-	-
G-12425-11-4-1	976 - 1100	400	1100	3	42	501	896	-
G-12425-12-4-1	1101 - 1225	500	1225	3	42	646	1021	-
G-12425-13-4-1	1226 - 1350	500	1350	3	42	646	1146	-
G-12425-35-4-1	1351 - 1475	500	1475	3	42	796	1271	-
G-12425-15-4-1 <i>alternativa G</i>	1351 - 1475	600	1475	3	42	796	1271	-
G-12425-36-4-1	1476 - 1600	500	1600	3	42	796	1396	-
G-12425-16-4-1 <i>alternativa G</i>	1476 - 1600	600	1600	3	42	796	1396	-
G-12425-37-4-1	1601 - 1725	500	1725	3	42	796	1521	-
G-12425-17-4-1 <i>alternativa G</i>	1601 - 1725	600	1725	3	42	796	1521	-
G-12425-38-4-1	1726 - 1850	500	1850	3	42	796	1646	-
G-12425-18-4-1 <i>alternativa G</i>	1726 - 1850	600	1850	3	42	796	1646	-
G-12425-20-4-1	1851 - 1975	980	1975	4	42	796	1396	1771
G-12425-21-4-1	1976 - 2100	980	2100	4	42	796	1396	1896
G-12425-22-4-1	2101 - 2225	980	2225	4	42	796	1396	2021
G-12425-23-4-1	2226 - 2350	980	2350	4	42	796	1396	2146
G-12425-40-4-1 <i>alternativa Hbb</i>	2100 - 2400	980	2400	4	331	796	1396	1795

D

OZGRT

P  
V  
C